




Freighter Conversion Data Sheet

The Aeronautical Engineers Inc. (AEI) B737-200SF Cargo Conversion per FAA STC ST00283AT and ST00287AT, consists of the installation of a 86"x137" cargo door on the left side of the fuselage, and modification of main deck to a Class E cargo compartment. After conversion the aircraft can carry seven 88"x125" and one 88"x108" containers or pallets.

AEI's cargo door has earned a reputation of being the most robust and reliable in the conversion industry. The cargo door is hydraulically operated and actuated from the inside of the aircraft by an independent system. Hydraulic pressure is available from two sources; a 28VDC electrically operated hydraulic pump or a manual hand pump. The door control and manual pump are located on the 9g barrier, allowing a single person to operate the door manually.

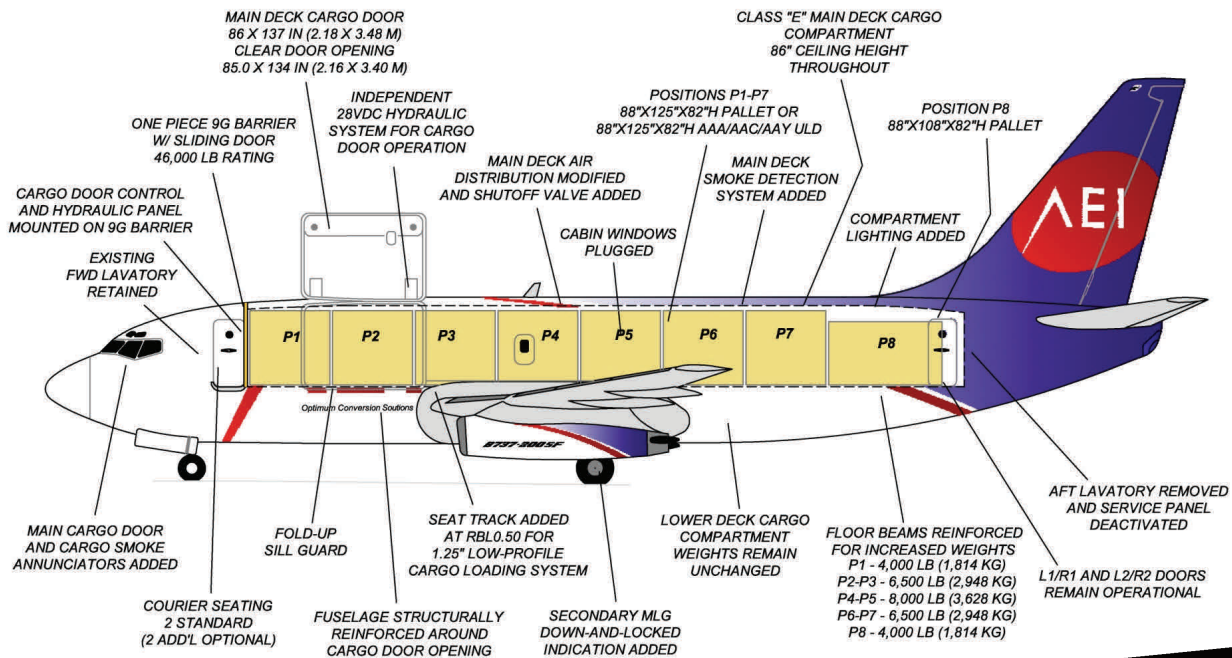

BOEING Licensed
3rd Party STC Provider

Approvals
United States FAA
STC ST00283AT
STC ST00287AT


Brazilian CTA
CHST 9308-01
CHST 9308-02



Freighter Weights and Volumes

Standard Gross Weight Aircraft	
MTW*	Up to 128,600 LB Max (58,330 kg)
MTOW*	Up to 127,100 LB Max (58,105 kg)
MZFW*	Up to 99,000 LB Max (44,905 kg)
MLW*	Up to 107,600 LB Max (48,806 kg)
BEW**	61,200 LB (27,760 kg)
Payload***	Up to 37,800 LB Max (17,145 kg)
Fuel Capacity	5,160 USG (19,531 L)
*Aircraft as-delivered weights	
**Typical BEW after conversion, depends on original aircraft configuration	
***Typical Max Payload, depends on aircraft OEW and MZFW	

Main Deck Usage Volume	
7 ULD's - 88"x125"x82"H and 1 ULD - 88"x108"x64"H	3,404 Ft³ (96.4 m ³)
7 Netted Pallets 88"x125"x80"H and 1 netted pallet 88"x108"x80"H	3,475 Ft³ (98.4 m ³)

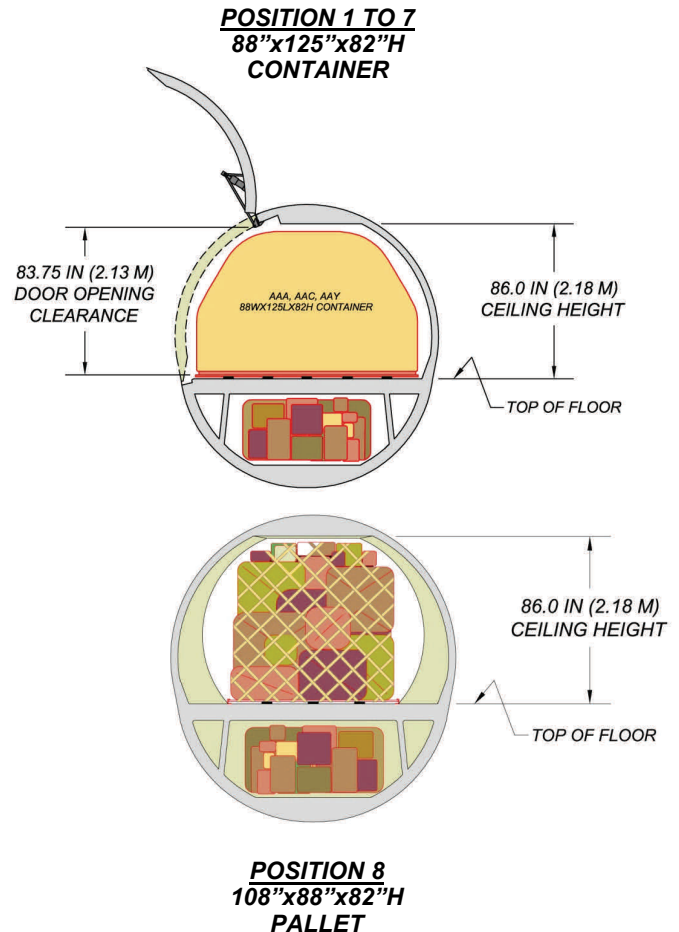

Main Attributes

- Seven 88"x125" and one 88"x108" Pallet Position
Can accommodate AAA containers in P1-P7
- Up to 37,800 LB (17,145 KG) Payload (depending on Model & Aircraft Weight Limits)
- 86" x 137" cargo door
- High reliability, 28VDC, independent cargo door hydraulic system
- Cabin windows replaced with lightweight aluminum window plugs
- 9g rigid cargo / smoke barrier with sliding door
- Relocated FDR for 86" ceiling height throughout cargo compartment, including last position
- Up to 4 Supernumerary Seats



Aeronautical Engineers, Inc.

Corporate Headquarters
7765 NW 54 Street
Miami, FL 33166

Phone: 1.305.594.5802
Fax: 1.305.594.5804

Sales & Marketing
Robert T. Convey
Vice President Sales & Marketing
2945 Townsgate Road
Suite 200
Westlake Village, CA 91361
Cell Phone: 1.818.406.3666

Email:
rconvey@aeronautical-engineers.com
sales@aeronautical-engineers.com
engineering@aeronautical-engineers.com

Web:
ww.aeronautical-engineers.com